


ViscoTec

VIPRO-PUMP MR

**READY TO TRICKLE.
PROCESS-SAFE.**

Precision dosing for low viscosity, self-leveling materials – made for trickle and resin impregnation applications.

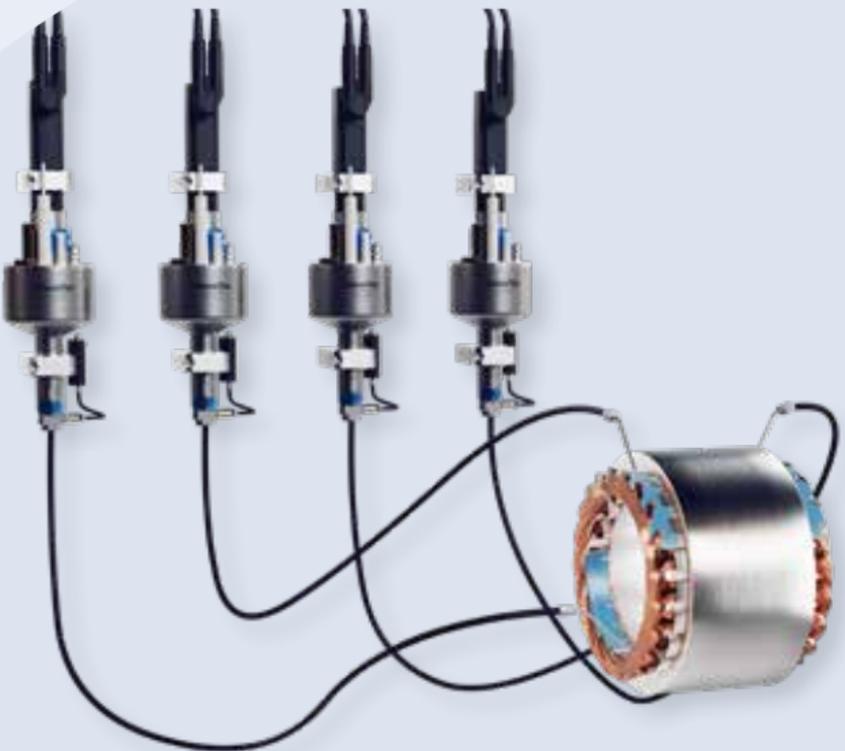

CONTACT:



mail@viscotec.com



www.viscotec.com

MORE PERFOR- MANCE FOR YOUR TRICKLING PROCESS.

For more details and
in-depth insights into
the world of **ViscoTec**
dosing technology:
Visit our website!



Join our community and
stay informed about the
latest developments
and industry trends:
Join us on LinkedIn!



Explore practical
applications of our
solutions in real-world
environments:

Watch now on YouTube!




EFFICIENCY STARTS WITH TRICKLING.




The impregnation of stators is a critical process step – the quality of the dosing determines the service life and quality.



The vipro-PUMP MR from **Visco-Tec** is tailored precisely to these requirements.

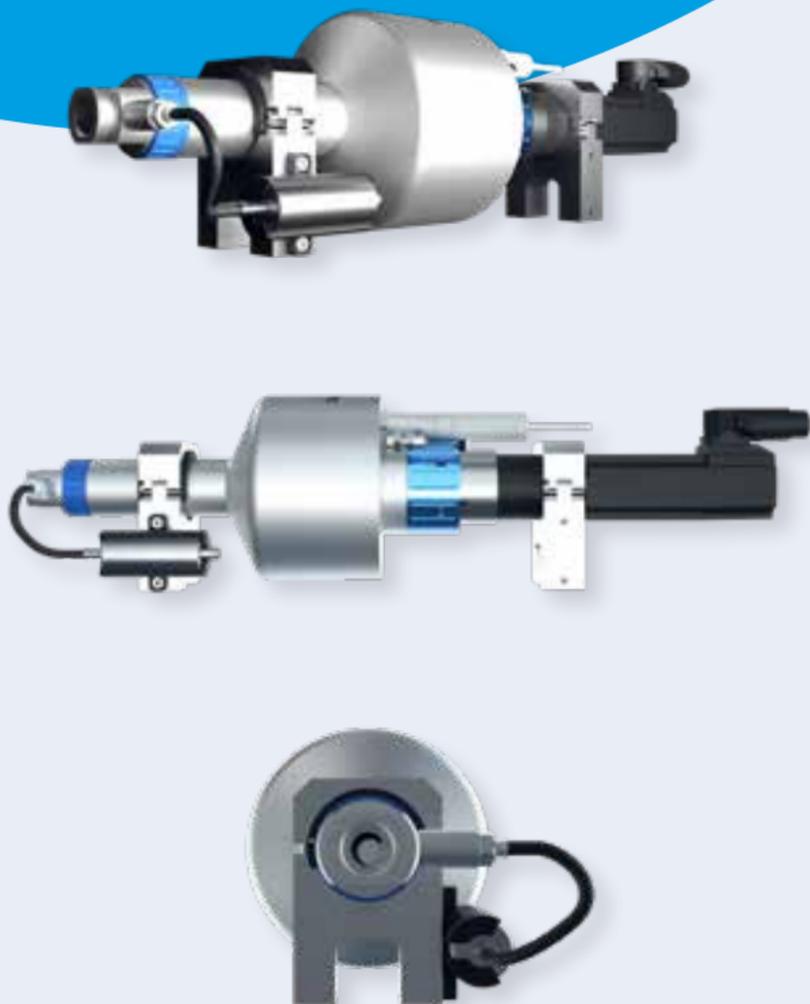



RELIABLE TRICKLING – SAFE DOSING

Ideal for creeping impregnating resins: For reliable and pulsation-free dosing.

INTEGRATED TANK – TWICE AS CLEVER

Protects the seals from aggressive material contact and also serves as a buffer for uninterrupted production.

PRECISION FOR DEMANDING APPLICATIONS

Accurate dispensing for high-performance impregnation with zero waste.

DEVELOPED FOR CHALLENGING MATERIALS

Perfect for low to medium viscosity materials with high creep properties – reliably controlled thanks to a design that meets the requirements.



PROFITABILITY MEETS DURABILITY

Robust, low-maintenance and easy to clean – for efficient processes and low operating costs.

MODULAR SYSTEM

Your system is individually adapted to your process – based on our process expertise and including engineering and project management.

Volume flow: ~38 to 110 ml/min
Min. dosing volume: 0.03 ml
For low to medium viscosity materials

The specifications depend on the dispenser type or dispenser size, the process and the material to be dispensed.

